



LRA50 Stone




LRA107 Pitch



LRA52 Blush



LRA53 Opulent

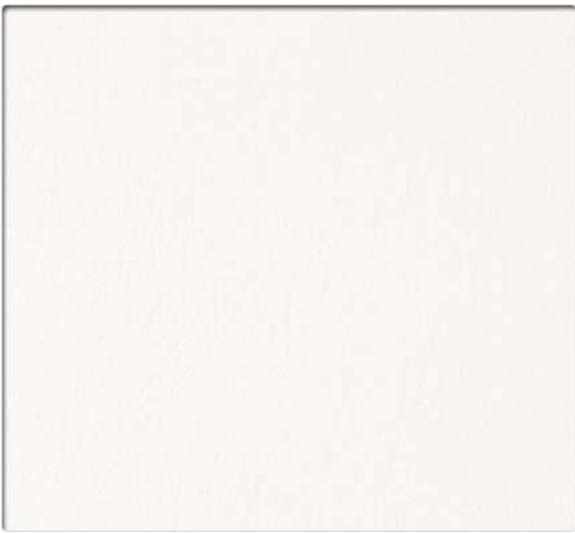

LRA54 Tonic



LRA55 Finch



LRA56 Marmalade




LRA57 Miso



LRA58 Chill



LRA59 Lace

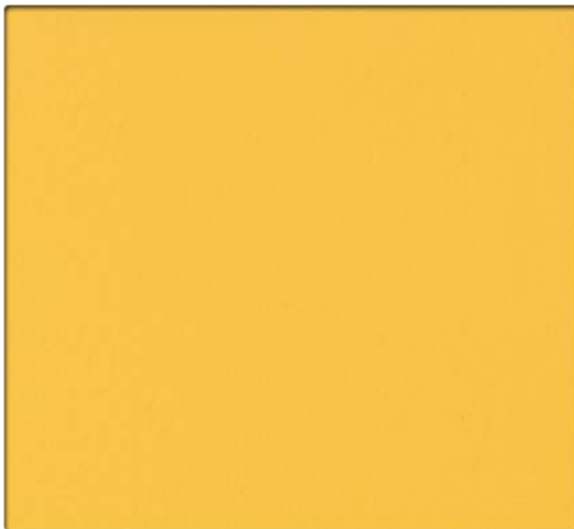

LRA60 Buttercup



LRA61 Salsa



LRA62 Red Earth




LRA63 Angora




LRA64 Pear



LRA65 Marigold

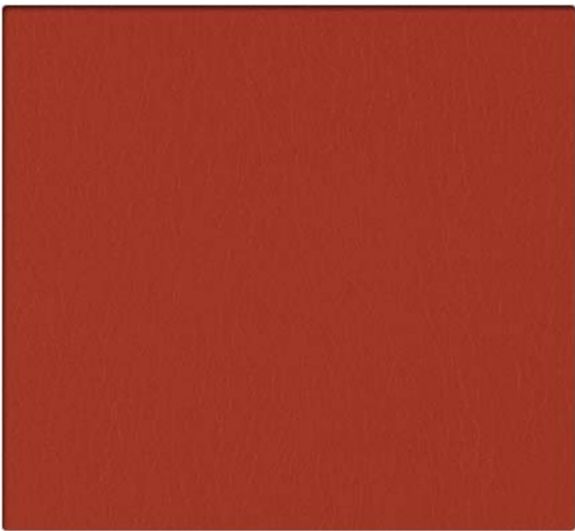


LRA66 Spice

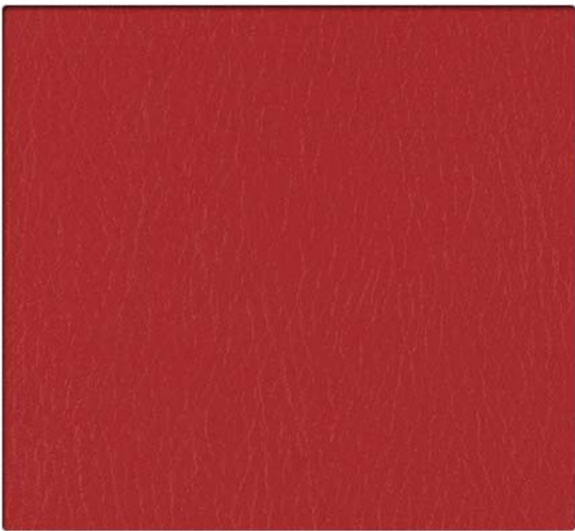

LRA67 Tamale




LRA68 Vicuna

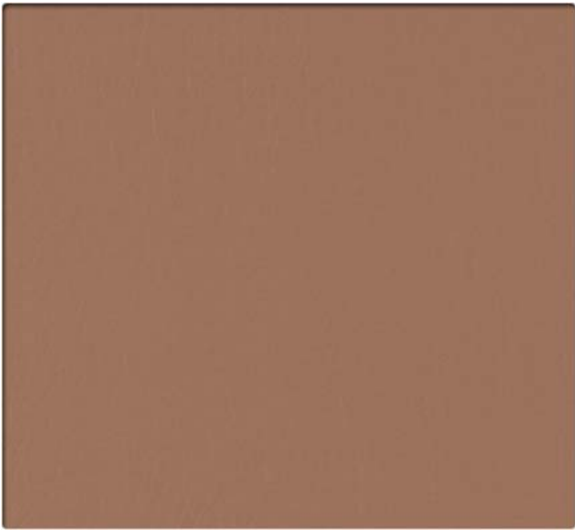


LRA69 Taupe




LRA70 Cashew

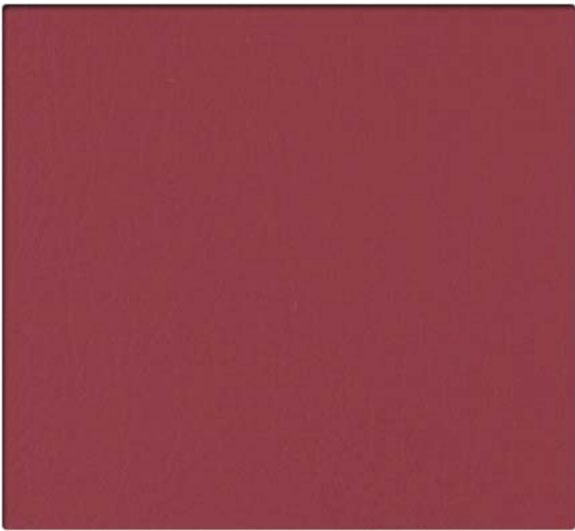


LRA71 Plum

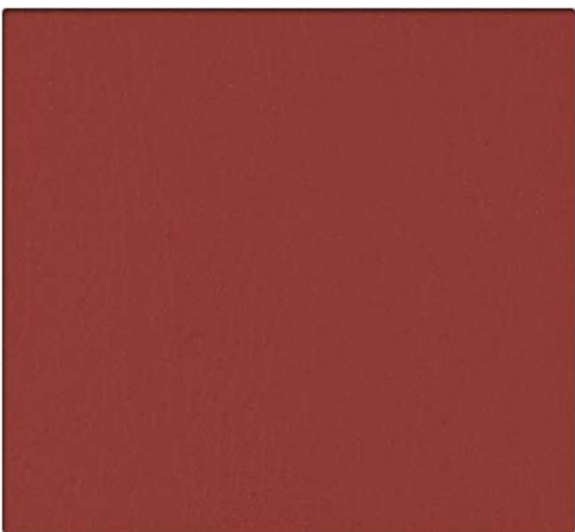

LRA72 Port

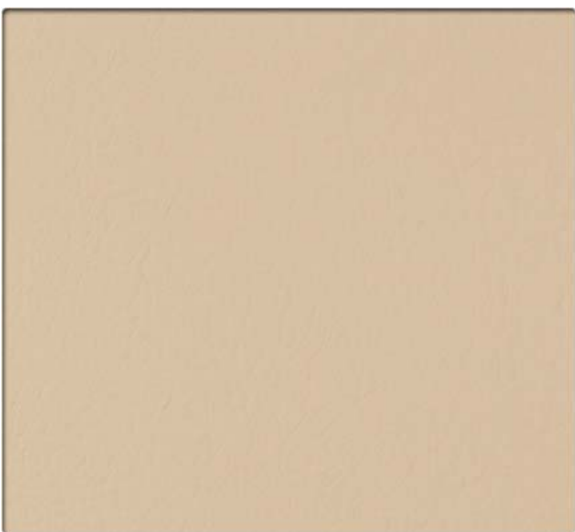


LRA73 Pumice

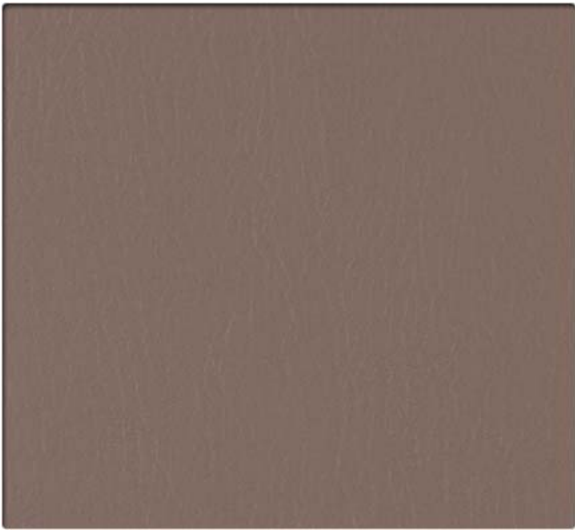


LRA74 Timberland



LRA75 Tawny

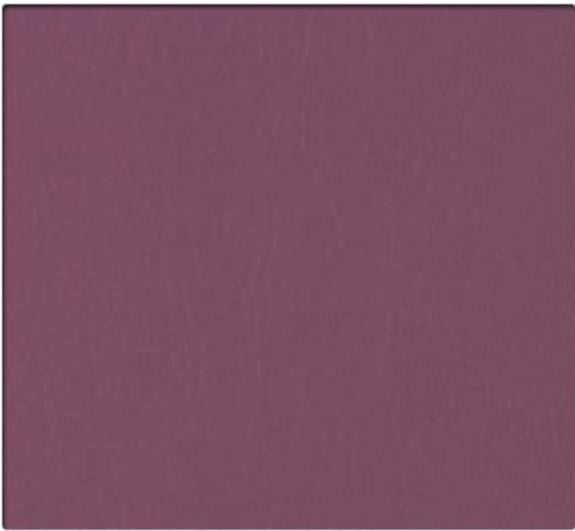


LRA76 Velvet

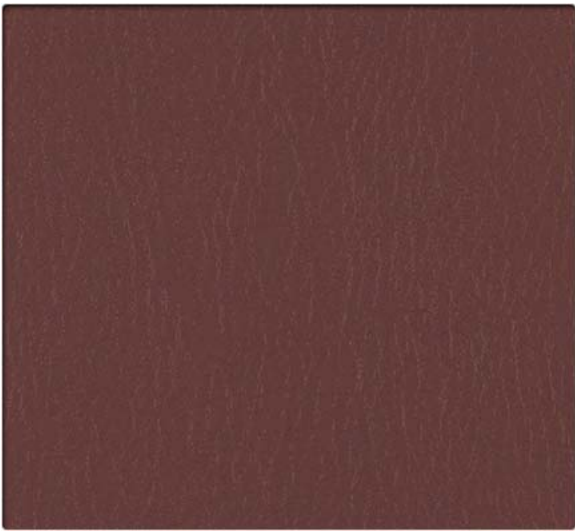

LRA77 Cordovan




LRA78 Barre

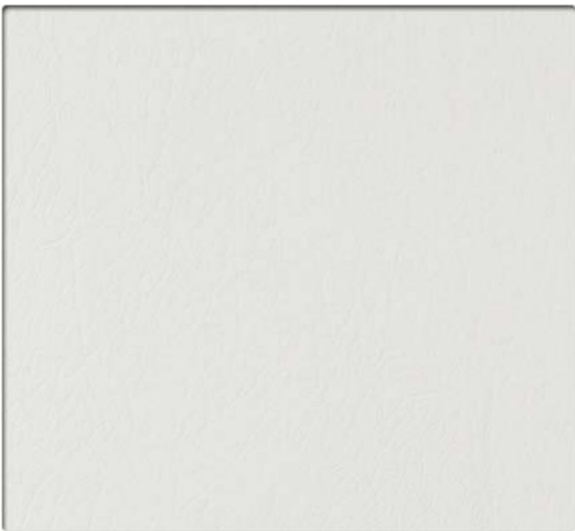

LRA79 Cloud




LRA80 Tint

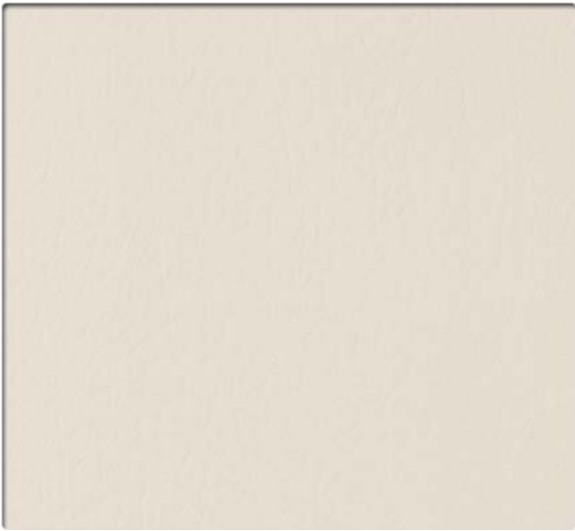


LRA81 Athens




LRA82 Titanium

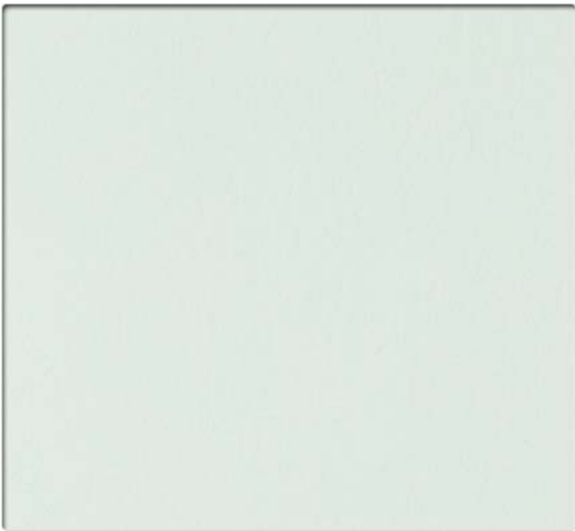

LRA83 Minty

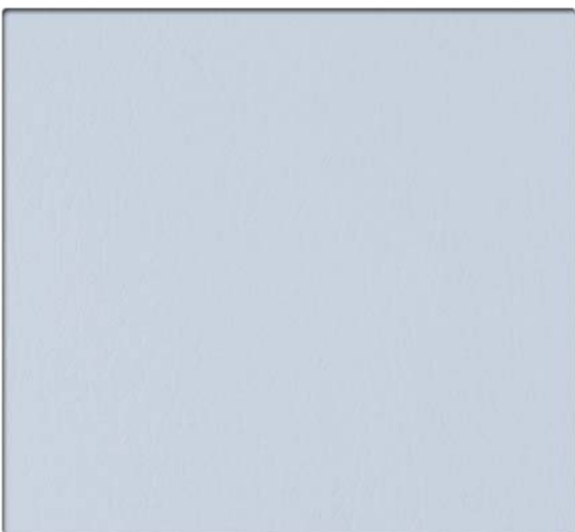

LRA84 Blue Ice

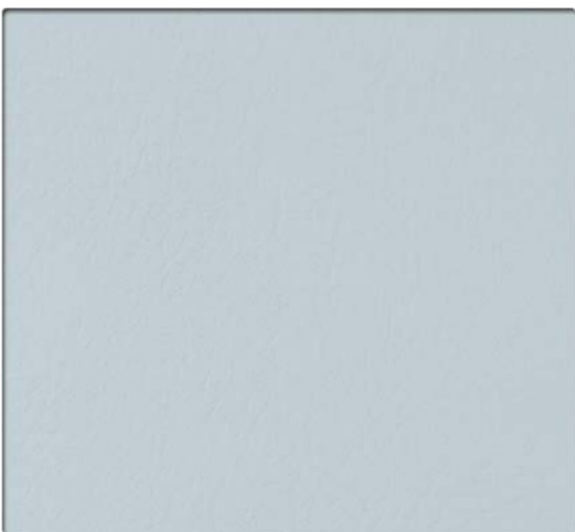

LRA85 Lake



LRA86 Gate



LRA87 Haze




LRA88 Hydro



LRA89 Champion




LRA90 Bahama

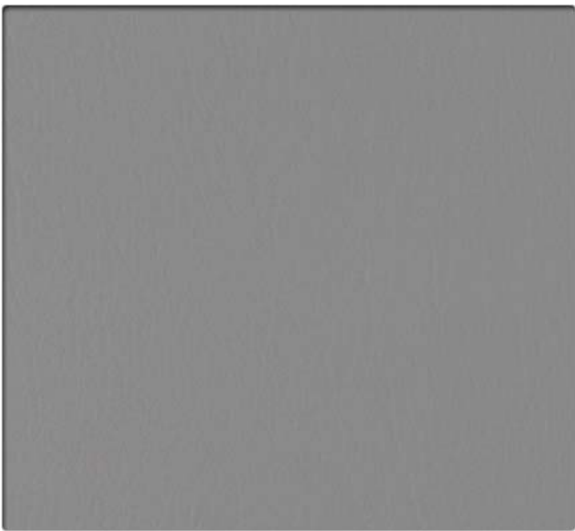


LRA91 Kitten



LRA92 Mink

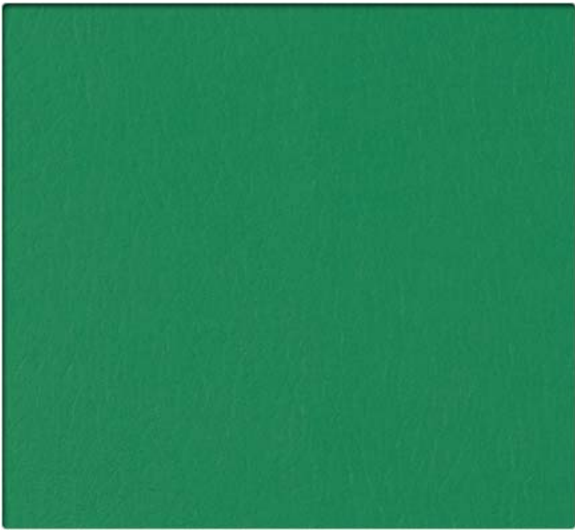


LRA93 Clover

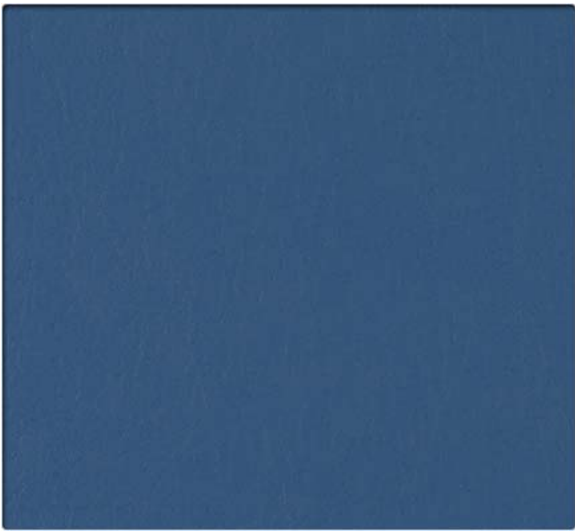

LRA94 Patriot




LRA95 Tranquil

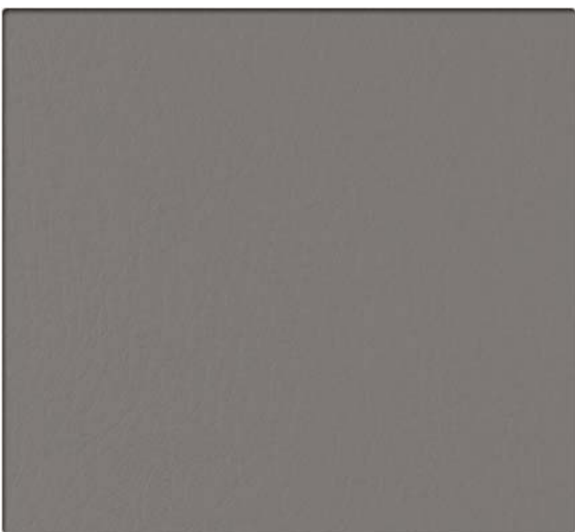

LRA96 Hearth



LRA97 Barista

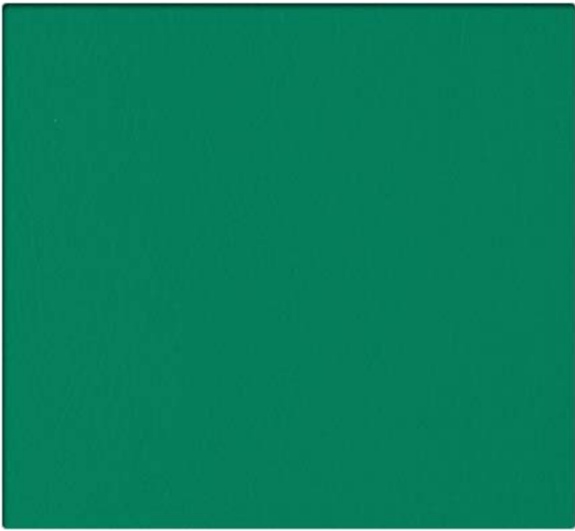


LRA98 Vine



LRA99 Mid-Blue



LRA100 Wizard

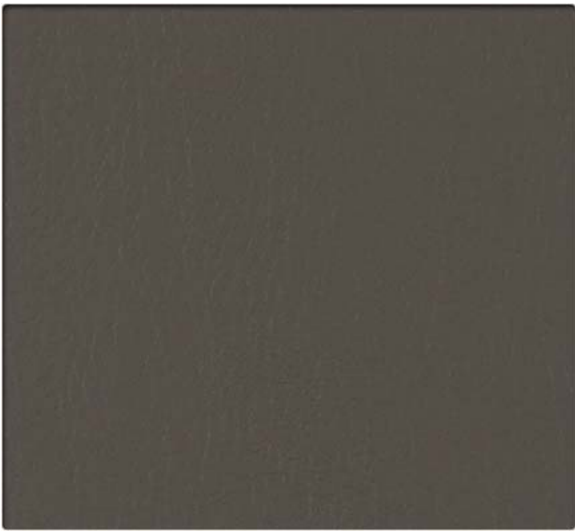

LRA101 Tempest



LRA102 Espresso



LRA103 Sherwood



LRA104 Evening



LRA105 Mystery



LRA106 Java



LRA51 Bisque

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- CFFA-Healthcare-201: Certified
- Denim stain resistant
- Fluid barrier
- Bleach-solution cleanable
- Enhanced fade resistance

Environmental

- GREENGUARD Gold Certified
- REACH Compliant
- RoHS Compliant
- No PFAS, fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials
- Formulated without Phthalates

Cleaning and Maintenance

Cleaning Code: **(W)** Clean with water-based foam or water-based cleaners only. Do not use solvents. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications

| | |
|-----------|--|
| Content | Non-Phthalate Vinyl Surface with Polyester Backing |
| Finish | Advanced Soil and Stain Resistant Top Coat |
| Backing | Polyester Fabric |
| Weight | 28.0 oz./lin. yd. ± 1.0 oz. |
| Width | 54 inches |
| Roll Size | 40 yards |

Performance Characteristics

| | |
|-----------------------------------|--|
| Abrasion Resistance** ASTM D-4157 | Exceeds 1,300,000 double rubs - heavy duty |
| Adhesion CFFA-3 | Warp: 4.0 lbs. min., Fill: 4.0 lbs. min. |
| Break Strength CFFA-17 | Warp: 85 lbs. min., Fill: 75 lbs. min. |
| Tear Strength CFFA-16 | Warp: 20 lbs. min., Fill: 27 lbs. min. |
| Seam Slippage CFFA-14 | Warp: 35 lbs. min., Fill: 30 lbs. min. |
| Colorfastness to Light CFFA-2 | 650 Hours, Class 4.0 |
| Crocking CFFA-7 | Dry: Class 4.0, Wet: Class 4.0 |
| Fluid Barrier | Inherent Fluid Barrier |

Flammability*

| | |
|--|---------|
| BIFMA | Class 1 |
| California Technical Bulletin 117-2013 Section 1 | Passed |
| IMO 2010 FTP Code, Part 8 (3.1) | Passed |
| NFPA 260 | Class 1 |
| UFAC | Class 1 |



This product is formulated without phthalates.



Stinson®

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279
F 248 299 3884

cfstinson.com